

## System connectors - FLKM S115-454-7LA/S400 - 2314901

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The FLKM S115/S400 adapter links a SIMATIC® S5 plug directly with the basic SIMATIC® S7 400 card.  
Conversion: 6ES5 454-7LA12 to 6ES7 422 1BH11-0AA0



### Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	328.6 GRM
Custom tariff number	85369010
Country of origin	Germany

### Technical data

#### General

Nominal voltage $U_N$	24 V DC
Max. permissible current	4 A (per path) 4 A (per connection, supply via separate power supply)
Connection type, connector	SIEMENS S5-115 U pin strip
Mounting position	Vertical
Standards/regulations	DIN EN 50178 IEC 62103

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### Supported controller

Controller	SIEMENS S5-115 U
- suitable I/O card	6ES5 454-7LA12

# System connectors - FLKM S115-454-7LA/S400 - 2314901

## Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27249205
eCl@ss 7.0	27249205
eCl@ss 8.0	27249205

## ETIM


ETIM 2.0	EC000237
ETIM 3.0	EC000237
ETIM 4.0	EC000237
ETIM 5.0	EC002584

## UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

## Drawings

### Circuit diagram

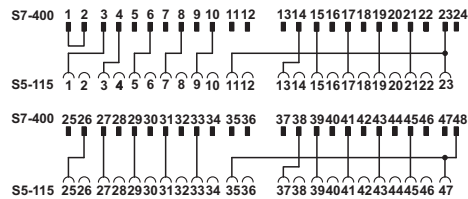

FLKM S115-454-7LA/S400 connection scheme