



## DPG-SERIES INCLINOMETER

### SPECIFICATIONS

Dual axis inclinometer

Measurement ranges  $\pm 5^\circ$ ,  $\pm 10^\circ$ ,  $\pm 15^\circ$  and  $\pm 30^\circ$

RS 232 and voltage output

### FEATURES


- Robust IP67/68 housing
- High accuracy
- High resolution
- Temperature compensated
- High output data transfer
- Cable integrated
- Programmable digital filtering to minimize influences from shock and vibration

### APPLICATIONS

- Mobile and stationary cranes
- Lift platforms
- Building control
- Weighing systems
- Truck chassis levelling
- Vehicle applications
- Road construction machines

The **DPG-Series** dual axis conductive inclinometer in aluminum housing offers the user modern microprocessor technology with an integrated active linearization and temperature compensation. This inclinometer is full calibrated, easy to mount horizontally and absolute plug and play compatible

Dimensions [mm]

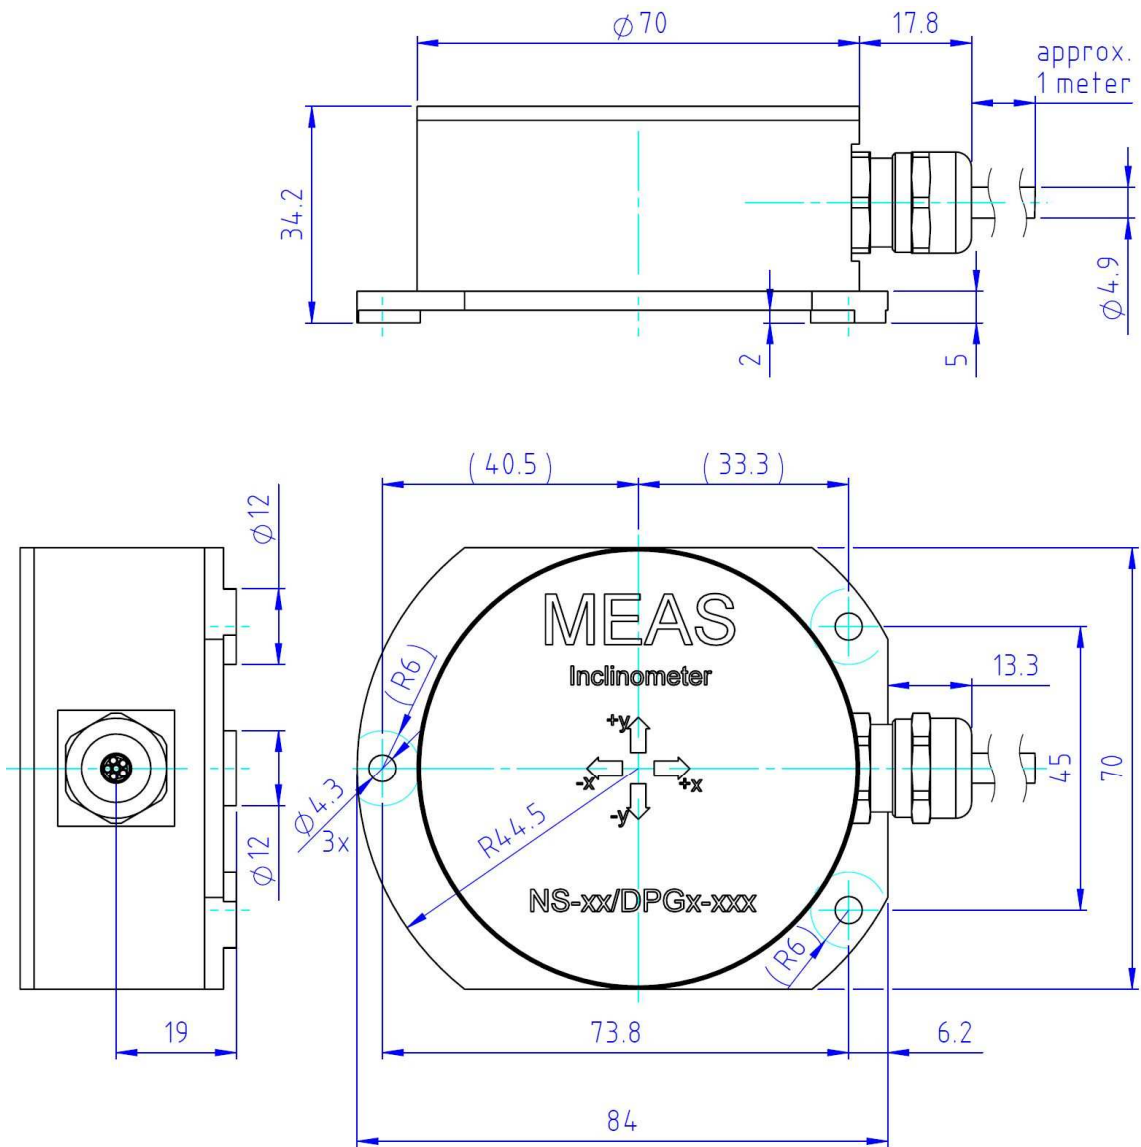

## DPG-SERIES INCLINOMETER

### PARAMETERS

	Conditions	Min	Type	Max	Unit
Measurement range		-5/-10/ -15/ -30		+5/ +10/ +15/ +30	°
Resolution		0.001			°
Accuracy 1 (absolute)	Ta = 0° to 50°C	0.06/ 0.09/ 0.2/ 0.5			°
Accuracy 2 (absolute)	Ta = - 40°C to 85°C	0.12/ 0. 15/ 0.25/ 0.8			°
Offset temperature drift error	Ta = - 25°C to 75°C	0.05			°
	Ta = - 40°C to 85°C	0.1			°
Noise RMS		0.003			°
Output rate, programmable	RS 232	0.5	10	25	Hz
Baud rate, programmable	RS 232		9.6		kB
Output voltage signal	analogue	0.3	0.5...4.5	4.7	V
Current consumption		20			mA
Power supply		7		30	VDC
Operation temperature range		-40		+85	°C
Storage temperature range		-40		+85	°C
Weight		270			g
Cable, pigtail	fixed	1000			mm
Dimensions	W x D x H	84 x 70 x 34.2			mm

### CABLE CONFIGURATION

No	Name	Description	Type	Cable color
1	Vcc	Positive power supply	Supply, Input	white
2	RxD	RS 232 input	Input 1	grey
3	GND	Ground	Supply, Input	yellow
4	Out X	Voltage out X	Output 2	brown
5	Out Y	Voltage out Y	Output 3	green
6	TxD	RS 232 output	Output 1	pink

For more details please use the product specification / application note / instruction manual.

## DPG-SERIES INCLINOMETER

### ORDERING INFORMATION

PART NUMBERING	UNIT	SHORT DESCRIPTION
G-NSDPG2-003	NS- 5/DPG2-RUD	Range +/- 5°, Vcc +7... 30VDC, output RS232, voltage +0.3 to +4.7V
G-NSDPG2-001	NS-10/DPG2-RUG	Range +/-10°, Vcc + 7... 30VDC, output RS232, voltage +0.3 to +4.7V
G-NSDPG2-002	NS-15/DPG2-RUG	Range +/-15°, Vcc + 7... 30VDC, output RS232, voltage +0.3 to +4.7V
G-NSDPG2-005	NS-30/DPG2-RUN	Range +/-30°, Vcc + 7... 30VDC, output RS232, voltage +0.3 to +4.7V

#### NORTH AMERICA

TE Connectivity Sensors, Inc.  
1000 Lucas Way  
Hampton, VA 23666  
United States  
Phone: +1-800-745-8008  
Fax: +1-757-766-4297  
Email: [customer-care.hmpt@te.com](mailto:customer-care.hmpt@te.com)  
Web: [www.te.com](http://www.te.com)

#### EUROPE

TE Connectivity Sensors  
Germany GmbH  
Hauert 13  
D-44227 Dortmund  
Germany  
Phone: +49-(0)231-9740-0  
Fax: +49-(0)231-9740-200  
Email: [customer-care.dtm@te.com](mailto:customer-care.dtm@te.com)  
Web: [www.te.com](http://www.te.com)

#### ASIA

TE Connectivity Sensors China Ltd.  
No. 26, Langshan Road  
High-tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Phone: +86-755-33305088  
Fax: +86-755-33305099  
Email: [customer-care.shzn@te.com](mailto:customer-care.shzn@te.com)

#### [www.te.com](http://www.te.com)

TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2017 TE Connectivity Ltd. family of companies All Rights Reserved.